



STEP 1: EZ FLEECE BACKED TPO MEMBRANE END JOINT

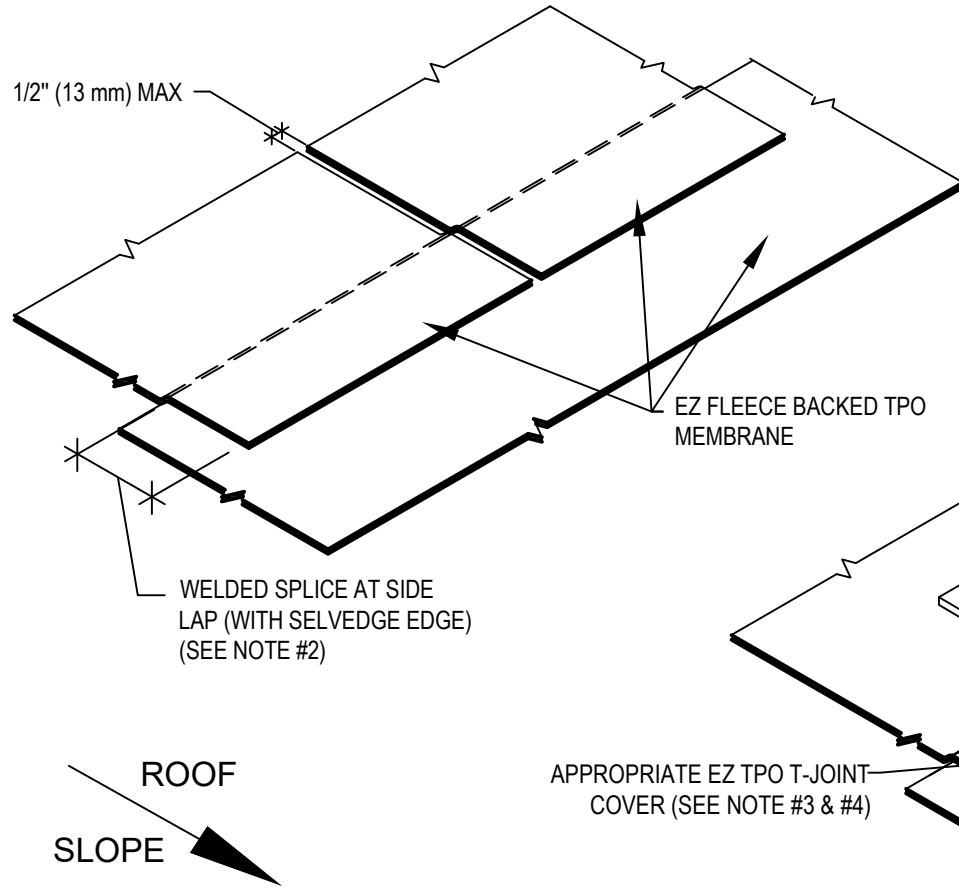

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-FB-LS-01 OR EZT-FB-LS-03 FOR WELD WIDTH.
3. T-JOINT COVER REQUIRED FOR 60 MIL OR THICKER.
4. EZ NON-REINFORCED FLASHING (4" x 4" MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

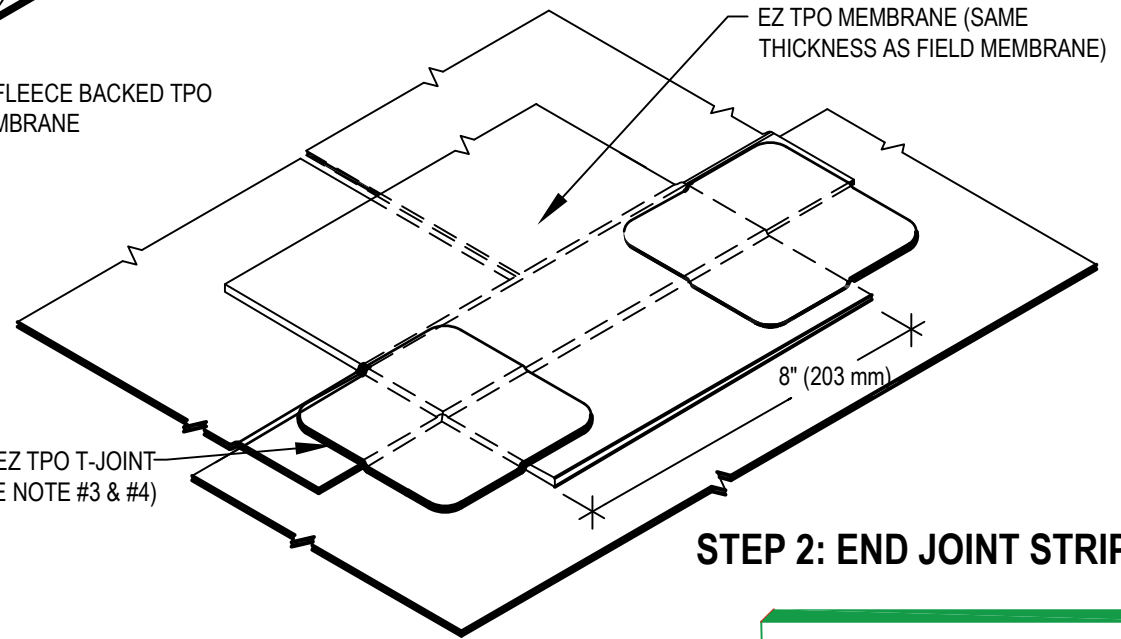

STEP 2: END JOINT STRIP IN

WARRANTY MEMBRANE REQUIREMENTS:
15-YEAR
 TPO - 45 MIL
20-YEAR
 TPO - 60 MIL



EZ FLEECE BACKED TPO MEMBRANE END LAP SPLICE OVER FIELD SEAM

MATERIAL: EZ FLEECE BACKED TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:
 04/20/2026

DETAIL NO.

EZT-FB-LS-04