


WARRANTY MEMBRANE REQUIREMENTS:
15-YEAR
 TPO - 45 MIL
20-YEAR
 TPO - 60 MIL



NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-FB-LS-01 OR EZT-FB-LS-03 FOR WELD WIDTH.
3. T-JOINT COVER REQUIRED FOR MEMBRANES GREATER THAN 45 MIL.
4. EZ NON-REINFORCED FLASHING (4" X 4" MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

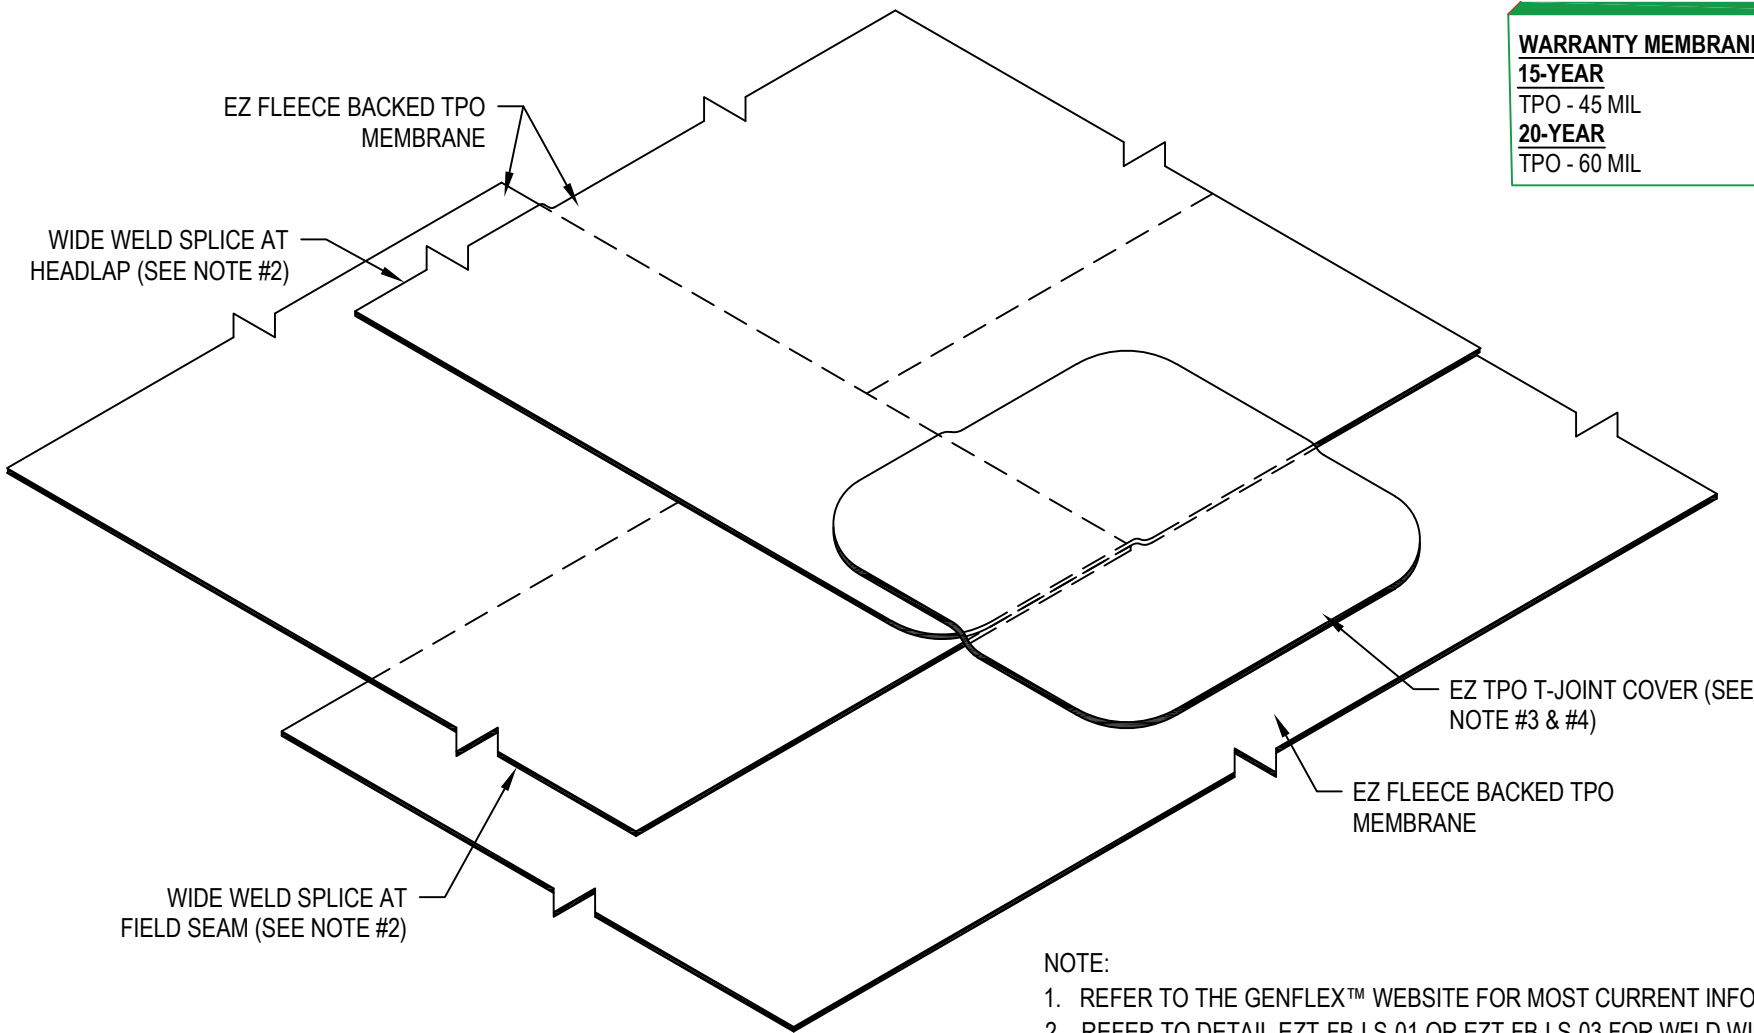

LAP SPLICE WITH HEADLAP OVER FIELD SEAM USING T-JOINT COVER

MATERIAL: EZ FLEECE BACKED TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/20/2026

DETAIL NO.

EZT-FB-LS-06

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE